



Specification

<b>Drawing NO.</b>	AFS-K03-23 / AFS-K03-23-B	<b>Ver.0</b>	<b>Rev. 2</b>
<b>Part NO.</b>	AFS-DMDM-12S-xxFT/ AFS-DMWDMW-12S-xxFT		
<b>Product Description</b>	7/16M-7/16M, 1/2" Superflexible Cable jumper		<b>Date:</b> 2020.12.29
<b>Draft:</b> Wang Ying <b>AFY/E</b>	<b>Checked:</b> Yu Ying <b>AFY/Q</b>	<b>Approved:</b> Xu Yiming <b>AFY/MR</b>	

**Part NO.:**AFS-DMDM-12S-xxFT

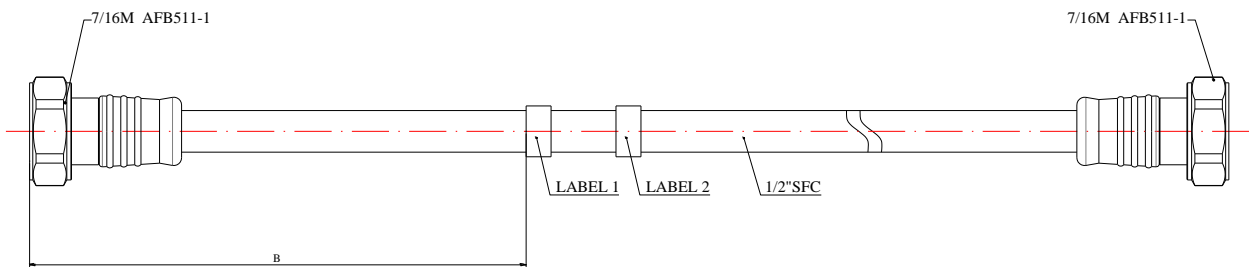

**Part NO.:**AFS-DMWDMW-12S-xxFT

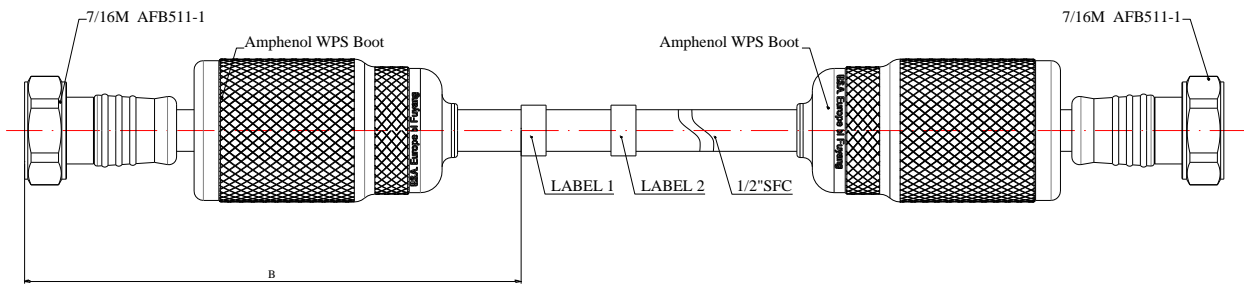

Label 1 information:

<b>Part NO.</b>	2020-04 MX Amphenol
	P/N:AFS-DMWDMW-12S-xxFT
	S/N:Bar Code
	XXXXXXXX

Label 2 information:

Amphenol Fuyang Mexico
Factory Made

## Reference

IEC61169-4(7/16)

## Electrical

Nominal Impedance ( $\Omega$ )	50
Frequency Range (GHz)	0.38-6
Return loss (dB)	$\leq -32(0.38-0.47\text{GHz})$ $\leq -32(0.6-0.96\text{GHz})$ $\leq -28(1.4-2.7\text{GHz})$ $\leq -23(3.4-3.8\text{GHz})$ $\leq -21(5.1-6\text{GHz})$
Attenuation (dB)	$\leq 0.0323\text{dB/ft}^*\text{L(ft)}+0.1\text{dB @}824\text{MHz}$ $\leq 0.0338\text{dB/ft}^*\text{L(ft)}+0.1\text{dB @}894\text{MHz}$ $\leq 0.0489\text{dB/ft}^*\text{L(ft)}+0.1\text{dB @}1700\text{MHz}$ $\leq 0.0505\text{dB/ft}^*\text{L(ft)}+0.1\text{dB @}1800\text{MHz}$ $\leq 0.0537\text{dB/ft}^*\text{L(ft)}+0.1\text{dB @}2000\text{MHz}$ $\leq 0.0553\text{dB/ft}^*\text{L(ft)}+0.1\text{dB @}2100\text{MHz}$ $\leq 0.0613\text{dB/ft}^*\text{L(ft)}+0.1\text{dB @}2500\text{MHz}$ $\leq 0.0642\text{dB/ft}^*\text{L(ft)}+0.1\text{dB @}2700\text{MHz}$ $\leq 0.0684\text{dB/ft}^*\text{L(ft)}+0.1\text{dB @}3000\text{MHz}$ $\leq 0.0738\text{dB/ft}^*\text{L(ft)}+0.1\text{dB @}3400\text{MHz}$ $\leq 0.0815\text{dB/ft}^*\text{L(ft)}+0.1\text{dB @}4000\text{MHz}$ $\leq 0.0936\text{dB/ft}^*\text{L(ft)}+0.1\text{dB @}5000\text{MHz}$ $\leq 0.1049\text{dB/ft}^*\text{L(ft)}+0.1\text{dB @}6000\text{MHz}$
Dynamic PIM with IEC 62037 (2*20W) (dBm)	$\leq -117$
Connector Insertion Loss (dB)	$\leq 0.05 \sqrt{F(\text{GHz})}$
Insulation Resistance (M $\Omega$ )	$\geq 5000$
Proof Voltage (V)	1000
Screen Efficiency (dB)	$\geq 110$
Power Rating (W)	400W@3GHz

## Mechanical

Nut Torque on 7-16 coupling nut	25 N*m
Spanner flat on 7-16 coupling nut	32mm
Torsion(Cable-Connect)	2.8 N*m
Tensile force(Cable-Connect)	350 N
Flat Plate Crush Strength	$\geq 16\text{N/mm}$
Bending Moment	1.5 N*m
Single Minimum Bending Radius	$\geq 35\text{mm}$

Multiple Minimum Bending Radius	≥50mm
Number of Bends, Minimum	15
Cable Length	L (ft)

## Material and

Connector Parts		Material	Plating (Standard)
Connector A 7/16M	Inner Conductor	Spring Copper	Ag 3µm
	Outer Conductor	Brass	Copper-tin-zinc 3µm
Connector B 7/16M	Inner Conductor	Spring Copper	Ag 3µm
	Outer Conductor	Brass	Copper-tin-zinc 3µm
Cable	Inner Conductor	Copper Plated Aluminum	
	Insulation	PE	
	Outer Conductor	Helical Corrugated copper tube	
	Jacket	PE, Contains No Halogen	
Waterproof Boot		Silicone rubber	

## Environment

UV Resistance	IE-68-2-5
Waterproofing Standard	IP68
Operating Temperature	-40°C~+85°C
Storage Temperature	-40°C~+85°C
Weather Standard	IEC 68 40/ 85/ 21
Thermal Shock	IEC60068-2-14-Na
Vibration	IEC60068-2-6-Fc
Shock	IEC60068-2-27
RoHS	Compliant

## Testing & Traceability

100% tested and guaranteed as per manufacturer specification. Traceability of VSWR & PIM test data through serial number on the label

## Label information

<b>Label 1</b> <ul style="list-style-type: none"> <li>- Production year month</li> <li>- Manufacturer</li> <li>- Part number</li> <li>- Serial number</li> <li>- Position: B=12 in-16 in</li> </ul>	<b>Label 2</b> <ul style="list-style-type: none"> <li>- Manufacturer</li> <li>- "Factory Made"</li> <li>- Position: centred</li> </ul>
---	--