

CFFP offer a scalable, low cost alternative to placing traditional cabinet-type centralized split points (also known as fiber distribution hubs—FDH) in the outside plant. Unlike metallic cabinets, CFFP are flood proof and can be installed in almost any location. Their compact size compared to large cabinets makes them easier to install and ideally suited to small communities and neighborhoods. Right-of-ways are no longer a concern and the units can be economically placed directly in the ground without the need for an expensive pad. CFFP are available in four sizes with up to 72, 96, 144 and 288 fiber counts, and in both stake-mount and vault-mount configurations. A CFFP Patch & Splice option is available for small hub applications, eliminating the need for a splice closure and grade level box.

MARKETS SERVED:


- ☒ Telecom / FTTX
- ☐ Utility
- ☐ Wireless
- ☐ Broadband Cable



CFFP

FEATURES

- Non-metallic construction provides superior flood-proof environmental protection
- Direct buried pedestal eliminates the need for expensive pads or concerns for getting right of ways for cabinet placement
- Sizes are configurable with smaller fiber counts to economically optimize fiber hub size for the neighborhood it will serve
- Fiber pass-throughs are available for secure circuits or for the flexibility to extend feed fibers to additional CFFP units for expanding neighborhoods
- Small profile is more aesthetically pleasing than cabinets when placed in residential areas and allows for lower freight and storage costs
- Vault mount and stake mount options allow placement directly on or next to a splicing vault
- Craft-friendly 360° access to internal fiber organization
- Locking cover for back of connectors gives protection while allowing easy access for cleaning without moving the fiber bulkhead
- Organization is optimized with specially designed 3-way bend controls so minimum bend requirements are met no matter how the fibers are routed
- The CFFP is pre-stubbed and tested with feed and distribution cables in the factory
- One splitter module fits all CFFP sizes
- Splitter module outputs are optimally designed for CFFP units. Minimizing leg lengths simplifies fiber housekeeping



Front view of interconnect panel, splitter storage, and fiber routing



Rear view of interconnect panel with pre-wired distribution and feed cables

CFFP Pedestals Ordering Information

Use the part number configurator below to specify CFFP options when ordering. For assistance or for information on special configurations, please call 847-806-6300.

CFFP

E

A


Pedestal Diameter
08 = 8" diameter
(max 72 fiber bulkhead count)
10 = 10" diameter
(max 96 fiber bulkhead count)
12 = 12" diameter
(max 144 fiber bulkhead count ships with 31.5" tall dome)
(max 288 fiber bulkhead count ships with 38" tall dome)

Fiber Bulkhead Count
024 = 24 Fiber Count
036 = 36 Fiber Count
048 = 48 Fiber Count
072 = 72 Fiber Count
096 = 96 Fiber Count
144 = 144 Fiber Count
14X = 144 Fiber Count*
192 = 192 Fiber Count*
216 = 216 Fiber Count*
288 = 288 Fiber Count

Base Type
Blank = Expanded-Capacity Direct-Buried Base
V = Vault-Mount Base

Fiber Connector Type
A = SC/APC

Fiber Cable Type & Stub Length**
B = Armored Loose Tube Cable w/100' Stub
D = Armored Ribbon Cable w/100' Stub
F = Dielectric Loose Tube Cable w/100' Stub
H = Dielectric Ribbon Cable w/100' Stub

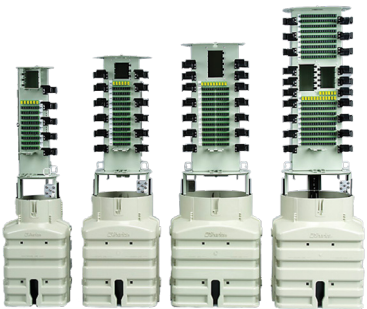

*** Future Expandable to 288 Fibers**
**** Other cable types available as special order**

SAMPLE PART NUMBERS:

CFFP08E 072AB = CFFP 8" diameter with Expanded-Capacity Direct Buried Base, 72 Fiber Bulkhead Count, SC/APC Connectors and Armored Loose Tube Cable with 100' Stub

CFFP08EV072AB = CFFP 8" diameter with Vault-Mount Base, 72 Fiber Bulkhead Count, SC/APC Connectors and Armored Loose Tube Cable with 100' Stub

NOTE ON MOUNTING HARDWARE:

Optional mounting hardware for expanded-capacity direct-buried bases.

Part Number	Description
UMB102 A	Universal Pole Mount Bracket w/hardware
UMS36-STD	36" Metal Mounting Stake w/hardware
UMS42-STD	42" Metal Mounting Stake w/hardware

Vault-mount bases include all necessary hardware for mounting.

SPLITTER MODULES:

Part Number	Description
CFSM-FP1132AA	1X32 with SC/APC connectors
CFSM-FP2116AA	Dual 1X16 with SC/APC connectors
CFSM-FP1116AA	1X16 with SC/APC connectors

Additional splitter options are available. Please see the Charles Fiber Splitter Modules datasheet at www.charlesindustries.com or contact your Charles Representative for additional information.




©2025 Charles Industries, LLC • All Rights Reserved • Specifications Subject to Change

D-OSP118-J25

charlesindustries.com

CFFP Patch & Splice Pedestals Ordering Information

Use the part number configurator below to specify CFFP options when ordering. For assistance or for information on special configurations, please call 847-806-6300.

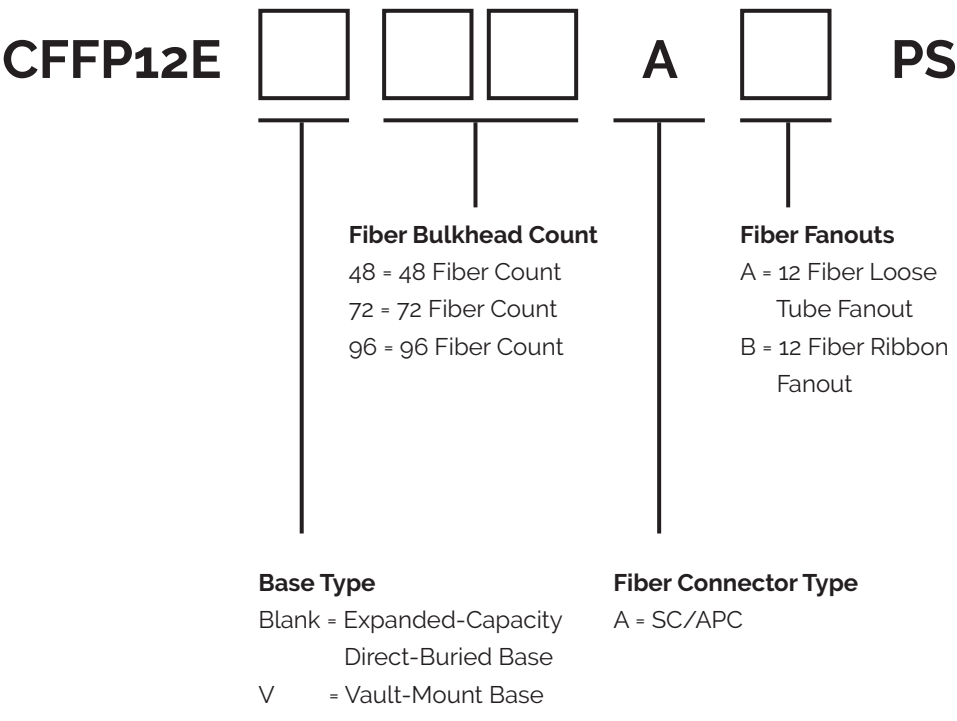

SAMPLE PART NUMBERS:

- CFFP12E 36AAPS = CFFP Patch & Splice 12" diameter with Expanded-Capacity Direct Buried Base, 36 Fiber Bulkhead Count, SC/APC Connectors and Loose Tube Fanouts
- CFFP12EVg6ABPS = CFFP Patch and Splice 12" diameter with Vault-Mount Base, g6 Fiber Bulkhead Count, SC/APC Connectors and Ribbon Fanouts

NOTE ON MOUNTING HARDWARE:

Optional mounting hardware for expanded-capacity direct-buried bases includes:

Part Number	Description
UMB102 A	Universal Pole Mount Bracket w/hardware
UMS36-STD	36" Metal Mounting Stake w/hardware
UMS42-STD	42" Metal Mounting Stake w/hardware

Vault-mount bases include all necessary hardware for mounting.

SPLITTER MODULES:

Part Number	Description
CFSM-FP1132AA	1X32 with SC/APC connectors
CFSM-FP2116AA	Dual 1X16 with SC/APC connectors
CFSM-FP1116AA	1X16 with SC/APC connectors

Additional splitter options are available. Please see the Charles Fiber Splitter Modules datasheet at www.charlesindustries.com or contact your Charles Representative for additional information.

SPLICE TRAY:

Part Number	Description
g7-FIBR24TRAY	4"x9" tray, 12/24 fibers per tray

Product Specification

Specifications for standard CFFP Pedestals (excludes Patch & Splice configurations).

	8" Pedestal	10" Pedestal	12" Pedestal (short dome)	12" Pedestal (tall dome)
Capacity	72 distribution fibers	96 distribution fibers	144 distribution fibers	288 distribution fibers
Connector Types	SC/APC	SC/APC	SC/APC	SC/APC
Input Fibers	6 fibers	6 fibers (option for 12)	12 fibers (option for 24)	24 fibers
Cable Types*	Loose tube (armored or dielectric) or ribbon cable (armored or dielectric)	Loose tube (armored or dielectric) or ribbon cable (armored or dielectric)	Loose tube (armored or dielectric) or ribbon cable (armored or dielectric)	Loose tube (armored or dielectric) or ribbon cable (armored or dielectric)
Cable Length	100'	100'	100'	100'
Splitter Module Capacity	3	3	5	9
Placement Configurations	Direct buried base including drop channel, channel plug and vapor barrier sheet; Vault mount base including mounting brackets with hardware and moisture pad (add "V" to part number to specify vault mount option)			

*Call for special configurations.

Vault Mount Options

Part Number	Description	Pallet Qty
P243624YBGTHXXX	24"x36"x24" HDPE vault with split cover and opening for mounting Amphenol "BB" pedestals, CFFP08EV, CFFP10EV and CFFP12EV, black base, dark green cover	6

Note:
For CFFP08EV and CFFP10EV, order hardware kit g7-S2BGEVM0810.
For CFFP12EV, order hardware kit g7-S2BGEVM12



CFFP08EV, CFFP10EV & CFFP12EV/P243624 Combo

Charles Industries, LLC
An Amphenol Company
1450 American Lane, 20th Floor, Schaumburg, IL 60173

 mktserv@charlesindustries.com
 (847) 806-6300

